




Rated voltage: 12 V **Capacity:** 26Ah C₂₀ at 25°C to 1.75V per cell

- * Designed service life of 5 years
- * World-wide compatibility
- * Easy maintenance with low operation cost
- * Easy installing and parameters readings
- * Wide operation temperature range
- * Superior low current discharge performance
- * Better safety performance and reliability
- * Modular and installation design
- * Environmental friendly

Size: 166x175x125

Weight: 7,8kg

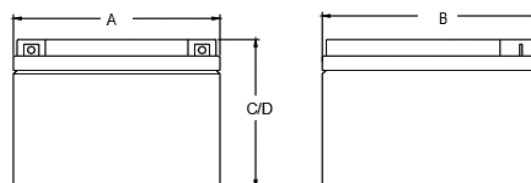


Application:

Telecommunication
UPS
Solar and wind power system
Electric power, nuclear power
Marine

Company Certificates

ISO 9001:2009
ISO 14001:2005

Terminal (F4)



Optional Terminal (F13)



Technical details

Max discharge current:	390A (5sec)	Self-discharge:	less than 9% / 90 days @ 25°C
Internal resistance (charged):	12mΩ @ 25°C	Max charge current:	6,5A
Temperature range		Charge voltage at 20°C	Float: 2.25-2.30V Cycle: 2.40-2.45V
Application temperature:	-20°C ~ 60°C	Terminal output:	M5
Storage:	-20°C ~ 60°C	Container	ABS
Charge:	-10°C ~ 50°C		
Temperature compens.factor:	20 mV/°C		

Temperature effect on battery capacity: 105 % @ 40°C 85 % @ 0°C; 60 % @ -20°C

**Discharge current
(A/25°C, 68°F):**

End Voltage	5min	10min	15min	30min	1h	3h	5h	10h	20h
1,60	95,0	64,0	48,0	28,5	15,0	6,68	4,47	2,46	1,34
1,65	90,1	60,9	45,9	27,4	14,6	6,44	4,36	2,40	1,33
1,70	84,9	57,8	43,7	26,2	14,2	6,20	4,24	2,36	1,31
1,75	79,7	54,5	41,1	24,9	13,7	5,95	4,10	2,33	1,30
1,80	74,3	51,3	39,1	23,6	13,2	5,71	3,95	2,30	1,28

**Discharge power
(W/25°C, 68°F):**

End Voltage	5min	10min	15min	30min	45min	1h	2h	3h	5h
1,60	185	121	90,0	55,0	40,0	31,7	19,6	13,4	8,54
1,65	173	114	85,1	52,3	38,2	30,3	19,0	13,1	8,39
1,70	161	107	80,2	49,4	36,3	28,9	18,3	12,5	8,22
1,75	151	99,7	75,2	46,6	34,3	27,5	17,6	12,0	8,03
1,80	139	92,7	70,3	43,7	32,3	26,0	16,9	11,4	7,83

Discharge curves

Temperature and capacity relation

