

iVMS-4200 V3.13.2

iVMS-4200 is designed to configure and manage Hikvision devices in a unified and intuitive manner, including the DVRs, NVRs, IP cameras, encoders, access control devices, security control panels, video intercom devices, VCA devices, etc. It provides multiple functionalities, including real-time live view, video recording, video footage search and playback, event and alarm receiving, etc.

Key Features

Live View

- Supports up to 64-window division for standard screen, and 48-window division for wide screen
- Supports customizing window division
- Supports viewing the stream information during live view, including bitrate, frame rate and resolution (except for devices added by Hik-Connect)
- Supports live view in fisheye mode for one or more fisheye cameras, and supports Panorama, PTZ, Half Sphere, AR Half Sphere, and Cylinder modes
- Supports smart linkage
- Supports resuming the latest live view status after the client restarts
- Supports displaying or hiding waste gas information during live view
- Supports previewing audio input channels
- Supports configuring auto-switch schedule
- Supports displaying channel recording status and alarm status
- Supports enabling or disabling VCA rules for a single real live window
- Supports speaking to the added IP Speaker, including emergency broadcast and speak in real time
- Supports manually triggering audible warning and strobe light for warnings and deterrence

PTZ Control

- Supports remote PTZ control, preset, patrol, and pattern settings
- Supports displaying analog speed dome's local menu via PTZ control panel
- Supports PTZ control of one-touch patrol and one-touch park
- Supports lens de-icing heater and PT de-icing
- Supports arming and tracking target (human or vehicle)
- Supports manually enabling the function of hazardous gas detection

Recording

- Supports recording both main stream and sub-stream for playback (if device supports)
- Supports manual recording
- Supports recording schedule for continuous recording, event recording and command recording
- Providing SAN and Hybrid Storage Area Network configuration for Hybrid SAN devices
- Supports overwriting video file and deleting expired video file

Playback

- Supports remote playback

- Supports up to 16-channel synchronous remote playback of video and audio files
- Supports viewing the stream information during live view (except for devices added by Hik-Connect), including bitrate, frame rate, resolution
- Supports instant playback, normal playback, alarm input playback, event playback, ATM playback, VCA playback, fisheye playback and POS playback
- Supports locating the playback time accurately
- Supports skipping unconcerned video footage during VCA playback
- Supports filtering the video footage with human or vehicle detected, and selecting human or vehicle to download only relevant segments
- Supports searching and exporting captured pictures of event by date and event type
- Supports downloading video file of devices added by Hik-Connect
- Supports downloading audio files from multiple audio input channels and video files from multiple cameras
- Supports downloading corresponding video and audio files when the remote playback ends
- Supports merging video files when downloading by date
- Provides player in the installation directory to view the downloaded video file
- Supports searching recorded video files triggered by event and playing the video files, and downloading the video files
- Event Playback supports downloading multiple video files to local PC
- Supports smart search and target retrieval (AcuSearch)
- Supports playback and download of original video streams without mosaic effects

Event Management

- Supports camera linkage, broadcast linkage, PTZ linkage, etc
- Supports configuring up to 4 cameras as the linkage of one event, and supports playing back the videos or captured pictures of the cameras simultaneously when searching historical events or viewing real-time events
- Supports sending email with captured picture as the attachment when the event is triggered
- Supports customizing alarm sound
- Supports subscribing event that the client can display in real time in event center when it is triggered
- Supports audible warning, pop-up live view and captured picture when alarm is triggered
- Supports searching for the historical events by event type or event details as the key words
- Supports exporting historical events in CSV format
- Supports configuring video events, access events, alarm events, and AI open platform events
- Supports searching and downloading event triggered captured picture and event triggered video
- Supports acknowledging the received event, viewing the event on E-map, etc
- Supports device arming and partition and zone settings
- Supports event configuration for video event, access control event, and security control event
- Supports the playback of video event
- Supports importing false alarm pictures and target frame information to self-learning library for line crossing detection and intrusion detection when viewing real-time events and searching for historical events

Statistics

- Supports data statistics of heat analysis, people counting, counting, road traffic, face retrieval, license plate retrieval, face capture, queuing-up time analysis, queue status analysis and intersection analysis
- Supports people counting by facial features and device types and displaying the duplicated persons
- Supports showing large picture of face retrieval, license plate retrieval, and the pictures can be exported for local storage

- Supports data retrieval for faces, human bodies, vehicles, persons who do not wear hard hats, and facial recognition check-in
- Supports searching facial recognition check-in records
- Supports searching frequently appeared persons and rarely appeared persons
- Supports AI dashboard retrieval function to search result for imported picture analysis task
- Supports hard hat retrieval by wearing a hard hat or not and face recognition status, and supports displaying ID type and ID No. in search results
- Supports searching for the historical temperature statistics of specific devices and displaying the information on a temperature map
- AI Dashboard supports searching for data of multidimensional people counting
- Supports searching for fire and smoke detections
- Supports searching for videos by time, event type, or tag
- Supports searching targets by picture
- Supports AcuSeek: Pinpoint targets via text input, view related recordings, search targets by picture, and export target pictures
- Supports Video Tracing: Retrieve logistics records by entering ID, view playback footage, and download records

Person Management

- Supports customizing organizations to managing persons
- Supports getting person information in a batch or via employee ID from added devices
- Supports the import/export of persons and faces on the client, as well as the export of person information stored in access control devices
- Provides multiple types of credentials, including card number, face, fingerprint, iris, voiceprint, and palm print for composite authentications
- Supports collecting face pictures by third-party camera (USB camera or the build-in camera of computer)
- Supports viewing resource statistics (person ID, card number, face pictures, irises, fingerprints, voiceprints, and palm prints)
- Supports extending person's validity period for access permission
- Supports reading card No. by swiping card
- Supports importing and exporting person information including card type and card number
- Supports issuing cards in batch to the persons with no cards
- Supports customizing display columns of the person list
- Supports batch editing person's validity period

Access Control

- Supports setting holiday schedule and access schedule template
- Supports setting a schedule for door's remaining open/closed status
- Supports setting access groups to relate persons, templates, and access points, which defines the access permissions of different persons
- Supports multiple modes for both card reader authentication and person authentication
- Supports the access control management of person, card, face pictures, irises, fingerprints, voiceprints, and palm prints
- Supports advanced functions such as multi-factor authentication, custom Wiegand, first person in, anti-passback, cross-controller anti-passback, and multi-door interlocking
- Supports setting authentication attempts for multiple time periods, and supports clearing the authentication attempts

- Supports filtering events by event type
- Supports customizing display columns of the event list
- Supports the client access to the authentication code when the device is offline
- Supports capturing pictures of the current intercom window

Video Intercom

- Supports controlling the door status (lock, unlocked, remain locked, remain unlocked, remain all locked and remain all unlocked) by the client remotely
- Supports video intercom and searching for real-time call logs
- Supports managing notices on the indoor station; supports applying application package to indoor station
- Supports setting authentication attempts for multiple time periods, and supports clearing the authentication attempts
- Supports refreshing door's status

Broadcast

- Supports uploading audio files in MP3 and WAV formats and managing them
- Supports configuring parameters of speaker units
- Supports starting live broadcast, emergency broadcast, audio playing, text notification, and FM broadcast via speaker units
- Supports configuring and applying scheduled broadcast tasks
- Supports updating the volume when opening the volume adjustment page to match the volume change alarm from the broadcast device
- Supports device batch settings, channel batch settings, SIP batch settings of speaker units

Time and Attendance

- Supports setting general rules for time and attendance
- Supports setting different rules for various attendance scenarios, such as one-shift and man-hour shift
- Supports customizing overtime levels and setting corresponding work hour rate
- Supports flexible and quick settings of timetables, shifts, and shift schedule
- Supports setting multiple timetables in one shift
- Supports getting detailed attendance data from the managed device, including check-in and check-out, break-in and break-out, overtime-in and overtime-out, etc.
- Supports customizing contents displayed in reports and sending reports to specified email address according to schedule
- Supports multiple types of reports according to different needs
- Supports sending the original attendance data to a third-party database (Microsoft® SQL Server® 2008 and above, MySQL V5.0.45 and above), and thus the client can access third-party T&A and payment system
- Supports calculating the break time as attendance
- Supports flexible shift schedule on weekend
- Supports editing flexible timetable and counting the day with insufficient attendance time under the set flexible timetable as absence
- Supports setting two leave periods per day
- Supports counting early check-in time as attendance
- Supports displaying the specific attendance status of leave or business trip, such as paternity leave for the attendance records and reports

Elevator Control

- Supports setting parameters for elevator control devices

- Supports setting the relay types of the elevator control devices and setting the relation between relays and floors
- Supports configuring non-stop floors

Security Control

- Accessing AX-series security control device
- Supports adding zone as hot spot on E-map and viewing the video of the linked camera
- Supports radar configuration, including drawing zones, drawing trigger line, setting master-slave tracking, setting parking points for linked camera, setting map calibration, drawing point cloud filter zones, and displaying environment learning information in blue points
- Supports drawing false track area
- Supports enabling terrain learning when setting smart linkage

Network

- Supports adding encoding devices and Hik-Connect devices
- Supports adding devices by IP address, domain name, IP Segment and ISUP account, and supports importing devices in batch
- Supports enabling transmission encryption using TLS (Transport Layer Security) protocol when adding a device
- Supports searching for the active online devices
- Supports NTP protocol for time synchronization from the client to the added devices
- Supports checking device's online users
- Supports two-way audio and broadcast function
- Supports applying the client in local area network and wide area network

General

- Supports transmission encryption when logging in the SDK over TLS mode
- Supports upgrading client and device firmware after detecting new versions
- Supports importing and exporting configuration file. For exporting files, supports exporting all files (including all configuration parameters and historical events) or export only configuration parameters
- Supports auto backing database up according to the configured schedule
- Supports log search and backup
- Supports adding facial recognition devices such as DeepinView and DeepinMind
- Supports remote configuration for added devices
- Supports adding online devices registered to Hik-Connect after logging into Hik-Connect
- Supports creating a password to activate device. For device which supports Hik-Connect, supports enabling Hik-Connect service when activating it
- Supports resetting device password
- Supports setting email when activating devices, and resetting the password of devices by the email
- Supports hardware decoding for live view and playback
- Supports downloading video files to PC in MP4 and AVI format
- Supports user permission management
- Supports E-map functions, including adding, deleting, editing and viewing e-map, zooming in/out and moving the e-map
- Provides topology management module to monitor network health status of connected devices
- Provides configuration wizards for access control and time and attendance, which helps users to quick start
- Supports importing the events of the access control devices to the client in CSV format (encrypted)
- Supports configuring display formats of date and time of the client

- Supports searching analysis result for video and captured picture task
- Supports face picture retrieval, human body retrieval and vehicle retrieval, and exporting the related video files
- Supports saving pictures in structure data format to meet GDPR standards in the EU
- Supports selecting the retention period of events (the default retention period is 3 years)
- Devices added by cloud service account supports live view and playback for up to 5 minutes, automatically ending after that time
- Supports longitude and latitude calibration for radars
- Supports customer traffic (face) in the intelligent application
- Supports accessing the fire protection gateway
- Supports radar tracking manual compensation
- Supports person passing records management, lamp effect management, channel control management, and person channel management
- Supports activate new devices users by changing the password
- Supports customizing homepage modules
- Supports adding switches and wireless bridges over the OTAP protocol
- Supports displaying the device HTTP port No. on the Online Device pane
- Supports automatically filling the device port No. on the adding online device pane
- Supports specifying the card reading mode as three bytes, four bytes, or full card No.
- Supports joining User Experience Program for product enhancement
- Supports automatic version update detection
- Supports submitting feedbacks via the Client

Specification

Category		Value
Database	Client Database	SQLite (encrypted)
General	User	50 users and one super user
	Group	256
	E-Map	256
Video	Encoding Device	256
	DeepinMind Server	1
	Camera	256 for all groups
	Live View	64-channel live view at a time on one screen *This does not indicate supporting the live view of 256 (64 * 4) channels at the same time. For details, refer to system requirement and live view performance.
	Auxiliary Screen Preview	One main screen and 3 auxiliary screens for live view
	Playback	16-channel playback at a time
Access Control	Access Controller	50
	Video Intercom Devices (Door Station, Indoor Station, Main Station)	256
	Elevator Controller	4
	Door	50
	Person	2,000
	Organization	10 levels
	Card	5,000
	Fingerprint	5,000
	Face Picture	2,000
	Iris	4,000
	Palm Print	4,000
	Access Group	50
	Schedule Template	16
Time and Attendance	Retention Period of Attendance Results	The retention period depends on the HDD capacity and the amount of the generated data.
	Schedule	32
Broadcast	Speaker Unit	128
	Broadcast Device	32
Security Control	Security Control Panel	16
	Security Radar	8
Network	Switch	16
Event and Alarm	Events or Alarms Sent to Clients	10 events or alarms per second
Supported Language		Arabic, Bulgarian, Croatian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Korean, Lithuanian, Norwegian, Polish, Portuguese, Portuguese (Brazil), Romanian, Russian, Serbian, Simplified Chinese, Slovak, Slovenian, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Ukrainian, Vietnamese

System Requirement

* For high stability and good performance, the following system requirements must be met.

Features	Requirements
Operating System	Microsoft® Windows 7 SP1 and above (32-bit or 64-bit) Microsoft® Windows 8.1 (32-bit or 64-bit) Microsoft® Windows 10 (32-bit or 64-bit) Microsoft® Windows 11 (32-bit or 64-bit)
CPU	Intel® Core™ i3 Processor and above
Memory	4 GB and above
Resolution	1280×768 and above


Live View Performance (This table is for reference only. The parameters are subject to the actual performance.)

H.264 (Software Decoding)						
	Channels	Resolution	CPU(%)	Memory(MB)	Bit Rate (Mbps)	Frame Rate (fps)
CPU: i3-8100@3.60GHz 4G Graphics Card: GT1030 Windows 10 64-bit	9	1080P	79-88	150.9	6	30
	2	8 MP	73-80	169.4	12	30
	64	cif	40-53	857.7	0.5	30
CPU: i5-9400F@2.9GHz 8G Graphics Card: GTX1050Ti Windows 10 64-bit	18	1080P	86-88	156.4	6	30
	4	8 MP	76-87	95.6	12	30
	64	4cif	74-85	922.5	0.5	30
CPU: i7-8700k@3.7GHz 16G Graphics Card: GTX2080×2 Windows 10 64-bit	27	1080P	86-89	173.4	6	30
	8	8 MP	72-82	194.3	12	30
	64	4cif	38-45	747.4	1	30
Smart H.264 (Hardware Decoding)						
CPU: i3-8100@3.60GHz 4G Graphics Card: GT1030 Windows 10 64-bit	10	1080P	59-72	509.8	6	30
	5	8MP	65-86	796.6	12	30
	64	cif (D3D11)	42-51	1003.9	0.5	30
CPU: i5-9400F@2.9GHz 8G Graphics Card: GTX1050Ti Windows 10 64-bit	20	1080P	74-78	518.1	6	30
	6	8MP	92-99	420.9	12	30
	64	4cif (D3D11)	53-60	996.2	1	30
CPU: i7-8700k@3.7GHz 16G Graphics Card: GTX2080×2 Windows 10 64-bit	24	1080P	75-77	714.5	6	30
	6	8MP	65-72	413.7	12	30
	64	4cif (D3D11)	67-75	1173.8	1	30
H.264+						
CPU: i3-8100 4G Graphics Card: GT1030 D5 Windows 7 64-bit	18	720P	55-68	1,208	3	30
	10	1080P	54-78	1,024	6	30
	-	8MP	-	-	12	30
CPU: i5-4590@3.3GHz 8G Graphics Card: GTX970 Windows 7 64-bit	44	720P	84-92	1,382	3	30
	16	1080P	79-89	1,536	6	30
	5	8MP	85-90	686	12	30
CPU: i7-6700k@4GHz 16G Graphics Card: GTX1070 Windows 7 64-bit	64	720P	79-94	1,125	3	30
	27	1080P	87-93	1,161	6	30
	10	8MP	92-96	1,249	12	30
H.265						
CPU: i3-8100 4G Graphics Card: GT1030 D5 Windows 7 64-bit	12	720P	70-77	349.1	3	30
	7	1080P	79-87	428.1	6	30
	-	8MP	-	-	12	30
CPU: i5-4590@3.3GHz 8G Graphics Card: GTX970 Windows 7 64-bit	25	720P	83-91	628.3	3	30
	12	1080P	88-94	983.2	6	30
	2	8MP	59-70	604	12	30


	64	4cif	81-90	1057.6	1	30
CPU: i7-6700k@4GHz 16G Graphics Card: GTX1070 Windows 7 64-bit	42	720P	90-97	937.6	3	30
	18	1080P	90-96	1207.9	6	30
	5	8MP	86-95	1097.7	12	30
	64	4cif	57-63	1150.5	1	30

Typical Application


Application for Video Security

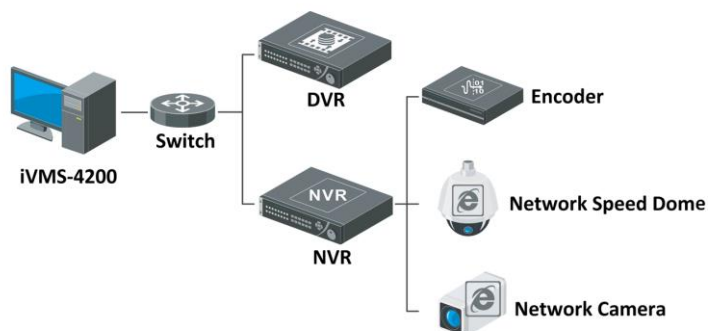


Application for Video Intercom

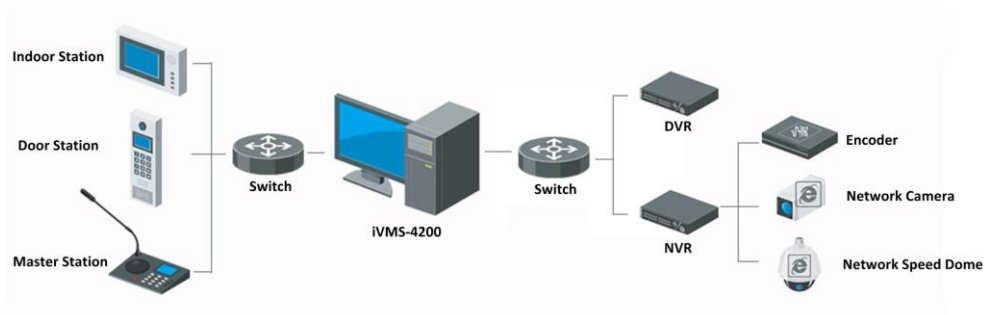

Application for Security Control Panel

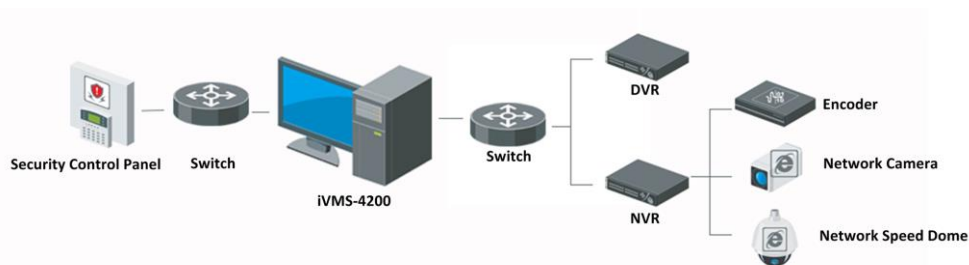

Application for Access Control

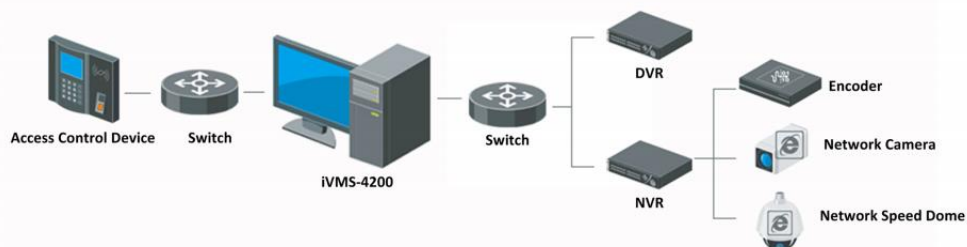

See Far, Go Further



www.hikvision.com
support@hikvision.com

