How to use Firefox v52 to live view Hikvision device

- 1. Install the plug in first.
- 2. Open a blank page of Firefox and input about:config

📵 Mozilla Firefox Start Page 🛛 🖌 +				- 0	x
★ 0   abouttconfig	v C Q Search	☆	<b>≜</b> +	1 C	, ≡
				m	ozilla
Press Enter. You will see			_	- 0	x
aboutconfig × +	C Q Search	<b>☆</b>			, ≡
•	This might void your warranty! Changing these advanced settings can be harmful to the stability, security, and performance of this application. You should only continue if you are sure of what you are doing. Show this warning next time accept the task				

Click on the, "I Accept the Risk" Button.

aboutcordig × +						_	• >	<u> </u>
Carlos Servetor aboutconfig			G Q Search	127	± + ±	*		-
I ICSA Test								
Sourche								0
Preference Name	Status	Type	Value					62
eccasibility.accaskeycausactivation	default	boolcan	true					
accessibility.blocksutorefresh	default	boolean	faice					
accessibility.browsewithcaret	default	hoolean	false .					
accessibility.browsewithcard; shortcut.crabled	default	boolean	true					
accessibility.delay_plugin_time	detault	integer	10000					
accessibility.delay_plugins	default	boolean	falce					
accessibility.force-disabled	default	integer.	0					
eccessibility.spc_architecture.enabled	detault	boolean	true					
accessibility.loadedInLastSession	default	boolean	falce					
an excitility annual for uses, former antical	the County	harmon become	Ealer-					
eccashhity.tablocus	detault	integer						
accessibility.tabfocus_applies_to_xul	default	boolean	falce					
accessibility.typeaheadfind	default	hoolean	false					
accessibility.typeaheadfind.autostart	default	boolean	true:					
accessibility.typeaheadfind.caresenative	detault	integer	0					
accessibility.typeaheadfind.enablesound	default	boolean	Toue					
accessibility typeshealf indenable timeout	default	bound bound	Leave .					
accessibility.typeaheadtind.ttaahdar	detault	integer	1					
accessibility.typeaheadfind.linksonly	default	boolean	falce					
as cressibility typesheadford must be Count Limit	de-foult	integer	1000					
eccessibility.typeaheadhind.matchea/Count Limeout	detault	integer	100					
accessibility.typeaheadfind.prefil/withselection	default	boolean	true					
accessibility.typeaheadfind.soundUBI	default	string	beep					
excessibility.typeaheadfind.startlinksonly	default	boolean	faber					
accessibility.typesheadfind.timeout	default	Integer	2000					
accessibility.usebrailledisplay	default	string						
accessibility assetution process	default	string						
accessibility.wam_on_browsewithcaret	detault	boolean	true					
advanced.mailttp	default	boolean	falce					
alertsalisableSlidingEffect	default.	Incodes and	faba-					
elerta, showhavicona	detault	boolean	telas					
app.feedback.baceURL	default	string	https://input.mozilla.org/%LOCALE%/feedback/%APP%/%VERSION%/					
app.support.hoseURI	die fault	string	https://support.mozilla.org/1/firefor/%VERSION%/%OS%/%LOCALE%/					
eppore address a	default	string	https://support.moaila.org/1/firefox/30/ERSION%2/300332/3LOCALE%/accessibility_ppt					
app.update.ahwindowtype	default	string	BrowsenAbout					
appupdateauto	default	boolean	The second se					-

You will then be in the plugin section of Firefox.

Right click, then go to NEW from the dropdown list. You will have 3 options to choice from, you will need to select Boolean. Once you have done that, you will need to type the plugin name:

plugin.load\_flash\_only

about:config × +							 X
( Eirefox aboutconfig				C <sup>e</sup> Q, Search	\$ ti i	ŀ ≙	≡
THCSA Test							
Seagch:							م
Preference Name	▲ Status	Type	Value				
accessibility.accesskeycausesactivation	default	boolean	true				ŕ
accessibility.blockautorefresh	default	boolean	false				
accessibility.browsewithcaret	default	boolean	false				
accessibility.browsewithcaret_shortcut.enabled	default	boolean	true				
accessibility.delay_plugin_time	default	integer	10000				
accessibility.delay_plugins	default	boolean	false				
accessibility.force_disabled	default	integer	0				
accessibility.ipc_architecture.enabled	default	boolean	true				
accessibility.loadedInLastSession	default	boolean	false				
ccessibility.mouse_focuses_formcontrol	default	boolean	false				
accessibility.tabfocus	default	integer	7				
accessibility.tabfocus_applies_to_xul	default		false				
accessibility.typeaheadfind	default	New boolean value	-				
accessibility.typeaheadfind.autostart	default	2 Enter the preference					
accessibility.typeaheadfind.casesensitive	default	•					
accessibility.typeaheadfind.enablesound	default	plugin.load_flash_c	only				
accessibility.typeaheadfind.enabletimeout	default	ОК	Cancel				
accessibility.typeaheadfind.flashBar	default						
accessibility.typeaheadfind.linksonly	default	boolean	false				
accessibility.typeaheadfind.matchesCountLimit	default	integer	1000				
accessibility.typeaheadfind.matchesCountTimeout	default	integer	100				
accessibility.typeaheadfind.prefillwithselection	default	boolean	true				


## Click OK and choose "false" for the VALUE.

about:config × +						- 0	×
O Firefox abouttconfig				C Q Search	☆自幸	<b>^ ™</b>	, =
THCSA Test							
Search:							۶
Preference Name	▲ Status	Туре	Value				1
accessibility.accesskeycausesactivation	default	boolean	true				
accessibility.blockautorefresh	default	boolean	false				
accessibility.browsewithcaret	default	boolean	false				
accessibility.browsewithcaret_shortcut.enabled	default	boolean	true				
accessibility.delay_plugin_time	default	integer	10000				
accessibility.delay_plugins	default						
accessibility.force_disabled	default	integer	0				
accessibility.ipc_architecture.enabled	default	boolean	true				
accessibility.loadedInLastSession	default	boolean	false				
accessibility.mouse_focuses_formcontrol	default	boolean	false				
accessibility.tabfocus	default	(a	22	C			
accessibility.tabfocus_applies_to_xul	default	Enter boolean value					
accessibility.typeaheadfind	default	plugin.load_flash_only					
accessibility.typeaheadfind.autostart	default	false					
accessibility.typeaheadfind.casesensitive	default	true					
accessibility.typeaheadfind.enablesound	default						
accessibility.typeaheadfind.enabletimeout	default						
accessibility.typeaheadfind.flashBar	default		OK Cancel				
accessibility.typeaheadfind.linksonly	default						
accessibility.typeaheadfind.matchesCountLimit	default	integer	1000				
accessibility.typeaheadfind.matchesCountTimeout	default	integer	100				

## After that just click ok, then the plugin will appear in the list with the others.

about:config × +					- 0	×
C Cirefox Aboutconfig			Cf Q, Search	合 白 ♣	* 🛡	=
T HCSA Teet						
Swageh:						P
Profesence Name	· Status	Type	Value			
places.frecency.typedViritBonus	default	integer	2010			
places.freency.urvisitedBookmarkBonus	default	integer	140			
pleces.frecency.unvisitedTypedBonus	default	integer	200			
placeshistory.enabled	defaolt	boolean	Log .			
places.history.expiration.transient_current_max_pages	user set	integer	104858			
plain_text.wrap_long_lines	default	boolean	true			
plugin.default.state	default	integer	1			
plugio.detaultXpi.state	detault	integer	7			
plugin.disable_full_page_plugin_for_types	user set	string	application/pdf			
plugin.importedState	user set	boolean	frue			
plagin.jeve.mime	default	string	application/x-java-vm			_
playindoad_flash_only	user set	boolean	fabe			
plugin.mousewheel.enabled	dofault	boolean	bue			
plugin.override_internal_types	default	boolean	false			

3. Click Win button and input %appdata% to open the Roaming folder, go to Mozilla\Firefox\Profiles\qzlhujzb.default.

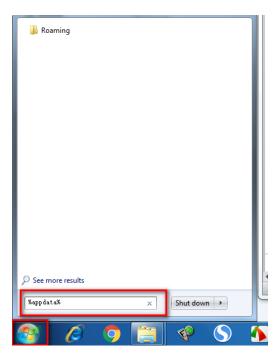


Find prefs.js, right click and choose "Edit", input below message between any two user\_pref messaes. Save it

user\_pref("plugin.load\_flash\_only", false);

📄 prefs.js - Notepad
File Edit Format View Help
user_pref("media.gmp-manager.buildID", "20170302120751");
user_pref("media.gmp-manager.lastCheck", 1489764362);
user_pref("media.gmp-widevinecdm.abi", "x86-msvc-x64");
user pref("media.gmp-widevinecdm.lastUpdate", 1489764365);
user_pref("media.gmp-widevinecdm.version", "1.4.8.903");
user_pref("media.gmp.storage.version.observed", 1);
user pref("media.hardware-video-decoding.failed", false);
user_pref("network.cookie.prefsMigrated", true);
user_pref("network.predictor.cleaned-up", true);
user_pref("pdfjs.migrationVersion", 2);
user pref("pdfjs.previousHandler.alwaysAskBeforeHandling", true);
user pref("pdfjs.previousHandler.preferredAction", 4);
user pref("places.history.expiration.transient_current_max_pages", 122334);
user_pref("plugin.disable_full_page_plugin_for_types", "application/pdf");
user_pref("plugin.load_flash_only", false);
user_pref("pref.browser.language.disable_button.up", false);
user_pref("sanity-test.device-id", "0x0416");
user_pref("sanity-test.driver-version", "10.18.10.3907");
user_pref("sanity-test.running", false); s("

4. Input device IP and get the login interface, click the button and click *i*, then click More information.

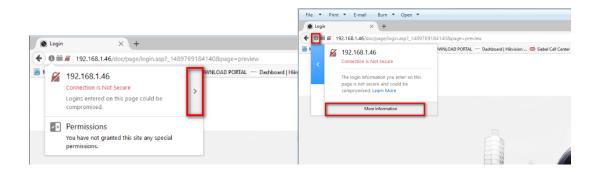

Click Permissions, for Web Components, choose "Allow"

File  Print  E-mail Burn Page Info - http://192.168.1.46/doc/pag	▼ Open ▼ ge/login.asp?_1489	769184140&page	=p —		×	
General Media Permissions S	ecurity					cvision 🐵 Siebel (
Permissions for: http://192.168.1.46						
Activate Plugins					^	
Intel® Identity Protection Technology	Use Default	🔿 Always ask		O Block		
Intel® Identity Protection Technology	Use Default	<ul> <li>Always ask</li> </ul>		O Block		
Microsoft Office	Use Default	<ul> <li>Always ask</li> </ul>		O Block		
Microsoft Office	Use Default	<ul> <li>Always ask</li> </ul>		O Block		
SR Web Components	Use Default	<ul> <li>Always ask</li> </ul>		O Block		
Web Components	O Use Default	<ul> <li>Always ask</li> </ul>	Allow	O Block		
Access Your Location						
Use Default		Always Ask		O Block		
Install Add-ons						6-
Use Default				Block		
					~	
				Help		4
			4		h.	

- 5. Close Firefox, run it again and input the IP address of device. It will ask if you want to allow the plugin, choose "Allow".
- 6. Input the user name and password to login the device and you will be able to live view.